

(Following Paper ID and Roll No. to be filled in your Answer Book)

**PAPER ID : 2133**

Roll No.

--	--	--	--	--	--	--	--	--	--

**B.Tech.**

**(SEMESTER-V) THEORY EXAMINATION, 2012-13**

**STRUCTURAL ANALYSIS – 2**

*Time : 3 Hours ]*

*[ Total Marks : 100*


**Section – A**

1. Attempt **all** question parts : **10 × 2 = 20**
- Name the three classical force methods used in the analysis of continuous beams.
  - What are the advantages of slope-deflection method over moment distribution method ?
  - What is meant by relative stiffness of a member ?
  - Define Stiffness factor.
  - State Muller Breslau's principle of influence line theorem.
  - How will you obtain degree of static determinacy ?
  - What is a two hinged arch ? Find out the horizontal thrust.
  - Distinguish between flexibility method and stiffness method.
  - Define the term yield moment and elastic bending.
  - Define safe factor.

**Section – B**


2. Attempt any **three** question parts : **10 × 3 = 30**
- A two hinged parabolic arch of span 20 m and rise 4m carries a uniformly distributed load of 5 t/m on the left half of span as shown in figure. The moment of inertia  $I$  of the arch section at any section at any point is given by  $I = 10 \sec \theta$  where  $\theta$  = inclination of the tangent at the point with the horizontal and  $I_0$  is the moment of inertia at the crown. Find
    - the reactions at the supports
    - the position and value of the maximum bending moment in the arch.

- (b) Draw the schematic influence time diagrams for maximum bending moment, shear force and horizontal thrust for a two-hinged parabolic arch shown in fig. 1.

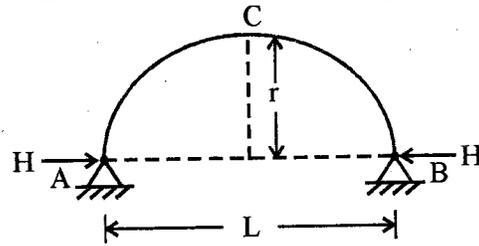


(fig. 1)

- (c) Analyse the continuous beam given in figure 2. by slope deflection method and draw the B.M.D

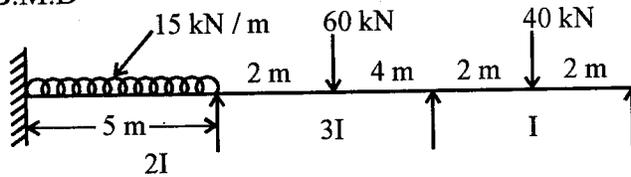


(fig. 2)

- (d) Analyze the continuous beam shown in Fig.3, using flexibility method if the download settlement of supports B and C in  $\text{cm}$  units are  $2700/EI$  and  $1200/EI$  respectively. Draw the bending moment and shear force diagrams.  $EI$  is constant.

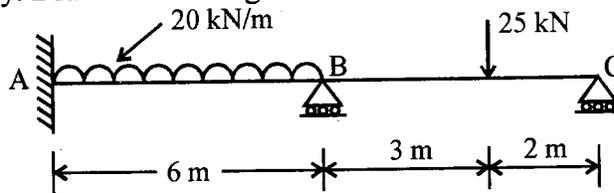

(fig. 3)

- (e) A propped cantilever is 6.0 m long and supports a collapse load of  $24 \text{ kN}$  as shown in Figure.4. Determine the required plastic moment of resistance  $M_p$ .

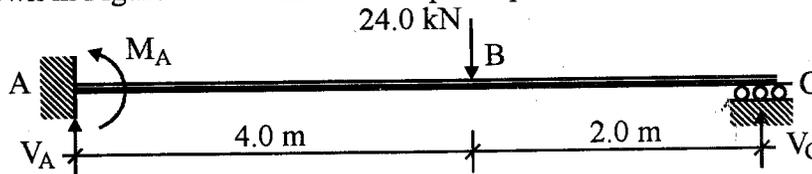

(fig. 4)

Section - C


Attempt all questions

$10 \times 5 = 50$

3. Attempt any two parts :


$(5 \times 2 = 10)$

- (a) Draw the bending moment diagram and shear force diagram for the continuous beam shown in figure 5, below using moment distribution method.  $EI$  is constant.

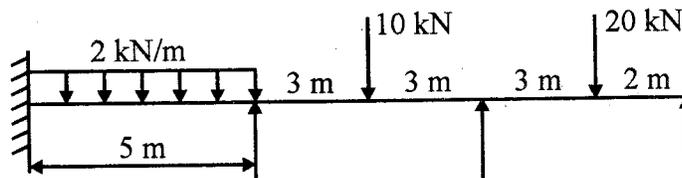


(fig. 5)

- (b) Analyse the frame shown in (fig.6) below by the slope deflection method and draw the bending moment diagram.

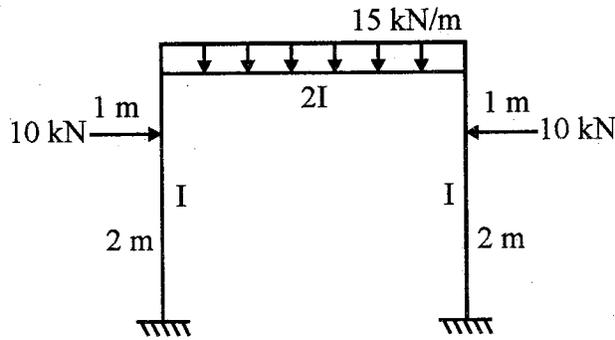

(fig. 6)

- (c) Using slope deflection method, determine slope at B and C for the beam shown in figure 7. below. EI is constant. Draw free body diagram of BC.

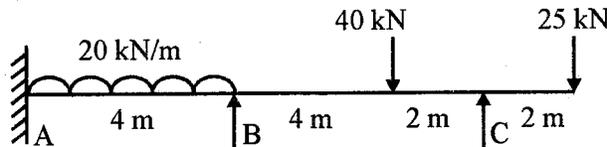

(fig. 7)

4. Attempt any **one** part :

$10 \times 1 = 10$

- (a) The cables of a suspension bridge have a span of 40 m and a dip of 5 m. Each cable is stiffened by a girder hinged at the ends and at mid span to enable to cable to maintain its parabolic shape. A UDL of 10 kN/m over the whole span and a live load of 30 kN/m over 10 m length in central part. Determine the maximum cable tension when the head of the live load is on the central hinge. Calculate maximum S.F. and B.M. at a section 10 m from the left end.
- (b) Draw the schematic influence line diagrams for maximum moment, and shear force for a two-hinged stiffening girder.

5. Attempt any **one** part :

$10 \times 1 = 10$

- (a) Determine the influence line for  $R_A$  for the continuous beam shown in the fig. 8. Compute influence line ordinates at 1 m intervals.




(fig. 8)

- (b) Derive the influence diagram for reactions and bending moment at any section of a simply supported beam. Using the ILD, determine the support reactions and find bending moment at 2 m, 4 m and 6 m for a simply supported beam of span 8 m subjected to three point loads of 10 kN, 15 kN and 5 kN placed at 1m, 4.5 m and 6.5 m respectively.

6. Attempt any **one** part :


10 × 1 = 10

- (a) Analyze the continuous beam shown in Fig. 9 by stiffness method. Draw bending moment diagram and elastic curve.

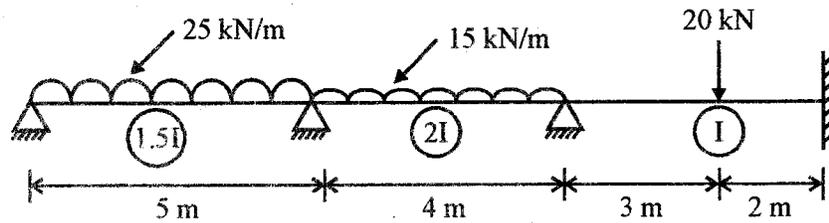

(fig. 9)

- (b) Analyse the Continuous beam shown in Fig. 10 using flexibility method and draw BMD.

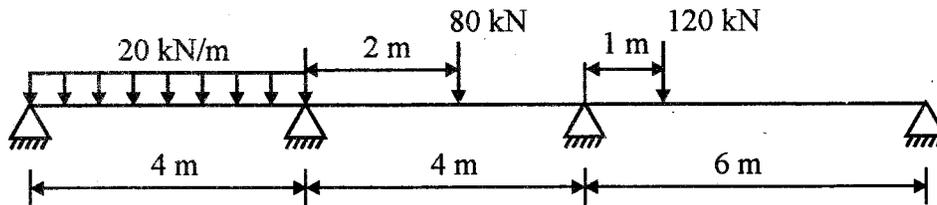

(fig. 10)

7. Attempt any **two** parts :

5 × 2 = 10

- (a) A beam of span 6m is to be designed for an ultimate u.d.l of 25 kN/m. The beam is simply supported at the ends. Design a suitable I section using plastic theory, assuming  $\sigma_y = 250 \text{ N/mm}^2$ .
- (b) Derive the safe factor for Rectangle, Diamond and Circular sections.
- (c) Explain the methods of plastic analysis.