

Printed Pages : 4



ECE064

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 100858

Roll No.

--	--	--	--	--	--	--	--	--	--

B. Tech.

(SEM. VIII) THEORY EXAMINATION, 2014-15
EARTHQUAKE RESISTANT DESIGN OF STRUCTURES

Time : 3 Hours]

[Total Marks : 100

- Note :**
- (1) Attempt **all** questions.
 - (2) Use of IS : 1893 (Part I) : 2002 is allowed.

1 Attempt any four parts of the following : 4×5=20

- (a) Define the following terms :
 - (i) Epicentre
 - (ii) Hypocentre
 - (iii) Iso-seismal
 - (iv) Seismograph
- (b) Explain various causes of Earthquake with neat sketches.
- (c) Differentiate between magnitude and intensity of earthquake.
- (d) State assumptions made in earthquake resistant design of structures.

- (e) Discuss the types and characteristics of waves generated during earthquake.
- (f) The standard torsion seismograph records a trace amplitude 8.5 mm long in N-S direction and 6.1 mm long in E-W direction. The distance to the epicenter is estimated as 112 Km. The station correction is +0.2. Determine the magnitude of the earthquake.

2 Attempt any four parts of the following : $4 \times 5 = 20$

- (a) What do you understand by degree of freedom ? Derive the expressions for free vibrations of undamped systems having single degree of freedom; with suitable diagram.
- (b) Deriving the suitable expressions explain over damped and under damped systems having single degree of freedom. What is critical damping ?
- (c) In an experiment of free-vibration, it is found that the maximum amplitude has reduced to 0.4 times its value in three complete cycles. Determine the percentage damping in the system.
- (d) What do you understand by Magnification Factor. Give its properties with the help of curve.
- (e) What is equivalent viscous damping ? Describe with suitable expressions and interpret the result.
- (f) What is response Spectrum ? Explain how it is developed and its uses.

3 Attempt any two parts of following : $2 \times 10 = 20$

- (a) Describe the Holzer method to analyze the MDOF systems.

- (b) State Rayleigh's method and derive its expression.
- (c) Consider an undamped 'n' degree of freedom system subjected to forced vibration, find the complete solution for displacement.

4 Attempt any two parts of the following : $2 \times 10 = 20$


- (a) Design an unreinforced 6 m high masonry shear wall as shown, using following data :

Unit weight of wall = 20 kN/m^3

Prism structure of Masonary = 10 Mpa

Seismic force, $H = 30 \text{ kN}$. No Superimposed Load.

Assuming wall thickness = 400 mm .

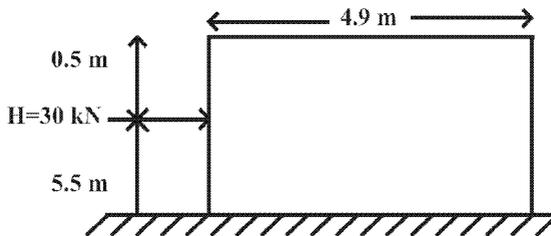

- (b) Enumerate the basic seismic design philosophy in brief.
- (c) List the step by step method for seismic analysis of R.C. Building as per IS code 1893 (part I) : 2002 by :
- (i) Response spectrum method.
 - (ii) Time History method.

5 Attempt any one parts of the following : 1×20=20

- (a) Enumerate the step by step method for design of foundation for impact type machine as per Indian standard code.
 - (b) A R.C.C frame consists of beams of span 6 m c/c. A floor inner beam carries a Bending Moment of 450 kNm and a shear force of 325 kN at beam column joint due to gravity and earthquake loads. Design the beam section for ductility.
-