



Printed Pages : 4

TEE-502

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 2056

Roll No.

B. Tech.

(SEM. V) EXAMINATION, 2008-09

CONTROL SYSTEM

Time : 3 Hours]

[Total Marks : 100

Note : Attempt all questions.

1 Attempt any **two** of the following : 10×2=20

- (a) Differentiate between open-loop control systems and closed loop control systems. Give an example in each type and explain its working.
- (b) Determine C/R for the following system :

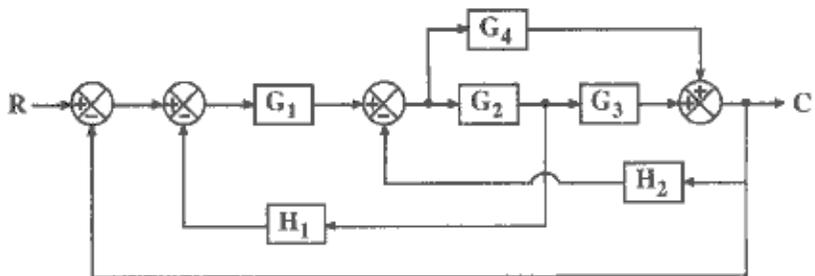


Fig.

2056]



1

[Contd...

- (c) Discuss the effect of an unpredictable disturbance on the response of a feedback control system. State and illustrate with examples, the important rules regarding signal flow graph algebra. Define and explain Mason's gain formula, and also show its implementation in an example.

2 Attempt any **two** of the following : 10×2=20

- (a) A unity feedback control system has its forward path transfer function as

$$G(S) = \frac{K}{S(1+ST)}$$

The maximum overshoot in the unit step response of this system is to be reduced from 60% to 20%. Determine the change in factor K to achieve this reduction.

- (b) Define parabolic - error constants for a control system. Derive the values of parabolic error constants and steady state error due to parabolic input for type 0, 1, 2 and 3 systems.
- (c) What is the effect of P-D controller on steady state error due to a unit ramp input in a second order system. Prove your answer mathematically.



3 Attempt any **two** of the following : **10×2=20**

- (a) State and explain the technical differences between an AC servomotor and conventional two phase induction motor.
- (b) List various methods of determining the stability of control systems. Discuss their relative merits and limitations.
- (c) What are the effects of adding poles and zeros on the root loci of a control system ? What is relation between root-loci and transient response ?

4 Attempt any **two** of the following : **10×2=20**

- (a) Discuss exact and asymptotic Bode plots for simple zero and simple pole on real axis.
- (b) How can you obtain closed loop frequency response from the given open loop transfer function in terms of Bode plots ? Discuss the Bode plots for non-minimum phase systems with suitable examples.
- (c) Constant M-circles and constant N-circles are normally used for unity feedback control systems. Explain how can you analyse a non-unity feedback control system with the help of constant M-circles and constant N-circles.



5 Attempt any **two** of the following : 10×2=20

- (a) What are the various properties of state transition matrix in reference to state space analysis of the control systems ? Define the terms state, state variable, state vector, state space and state equations.
- (b) The transfer function of a control system is given as below :

$$\frac{C(S)}{R(S)} = \frac{S^2 + 2S + 3}{S^4 + 2S^3 + 3S^2 + 5S + 7}$$

Obtain its state space representation in controllable canonical form and observable canonical form.

- (c) Give the procedure of designing of a cascade lag-lead compensator for a given linear control system. Illustrate the procedure with the help of an example.
-

