

B. TECH
(SEM IV) THEORY EXAMINATION 2017-18
THEORY OF AUTOMATA AND FORMAL LANGUAGES

Time: 3 Hours

Total Marks: 70

Note: Attempt all Sections. If require any missing data; then choose suitably.

SECTION A

1. Attempt all questions in brief. 2 x 7 = 14
- a. Define alphabet, string and language.
 - b. Design a regular expression that accepts all the strings for input alphabet {a,b} containing exactly 2 a's.
 - c. Design a NFA that accepts all the strings for input alphabet {a,b} containing the substring abba.
 - d. Define Chomsky hierarchy.
 - e. Is context free language closed under union? If yes, give an example.
 - f. Convert NFA into equivalent DFA by taking any suitable example.
 - g. Remove useless productions from the given productions: $S \rightarrow AB|ab$,
 $A \rightarrow aA|B|a$, $B \rightarrow D|E$

SECTION B

2. Attempt any three of the following: 7 x 3 = 21
- a. Define Deterministic Finite Automata (DFA) and design a DFA that accepts the binary number whose equivalent is divisible by 5.
 - b. State recursive definition of regular expression and construct a regular expression corresponding to the state transition diagram as shown in Fig.1

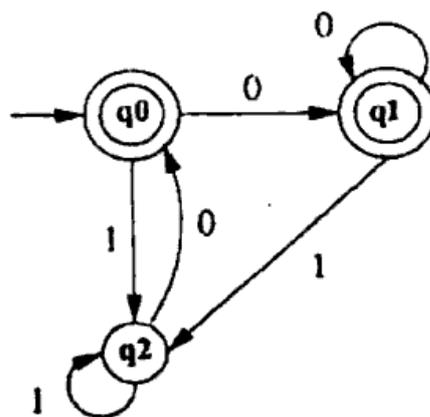


Fig.1

- c. Reduce the given grammar $G = (\{S,A,B\}, \{a,b\}, P, S)$ to Chomsky Normal Form. Where P is defined as:
 $S \rightarrow bA | aB$
 $A \rightarrow bAA | aS | a$
 $B \rightarrow aBB | bS | b$
- d. What is Push Down Automata (PDA)? Design the PDA for the language $L = \{wcw^R | w \in \{a,b\}^*\}$
- e. Define Turing Machine (TM). Construct the TM for the language $L = \{a^n b^n | n > 0\}$.

SECTION C

7 x 1 = 7

3. Attempt any *one* part of the following:

- (a) Describe Mealy and Moore machines with example. Convert the given Mealy machine as shown in Fig. 2 into Moore Machine.

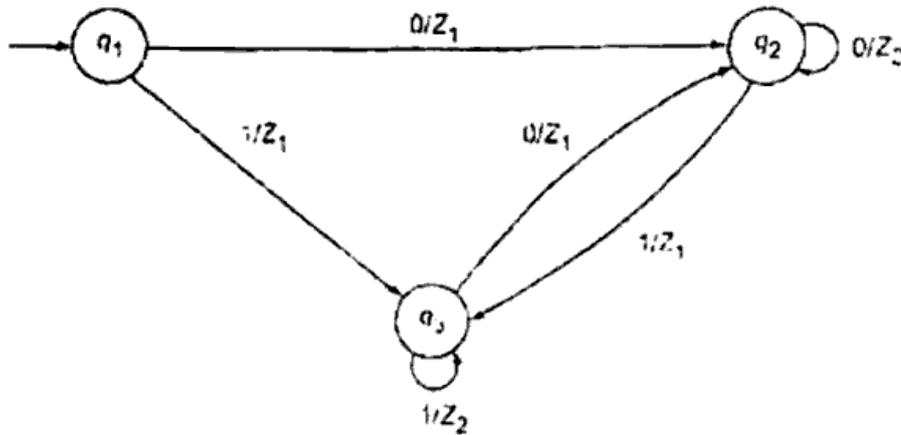


Fig. 2

- (b) Construct the minimum state automata equivalent to DFA described by Fig. 3

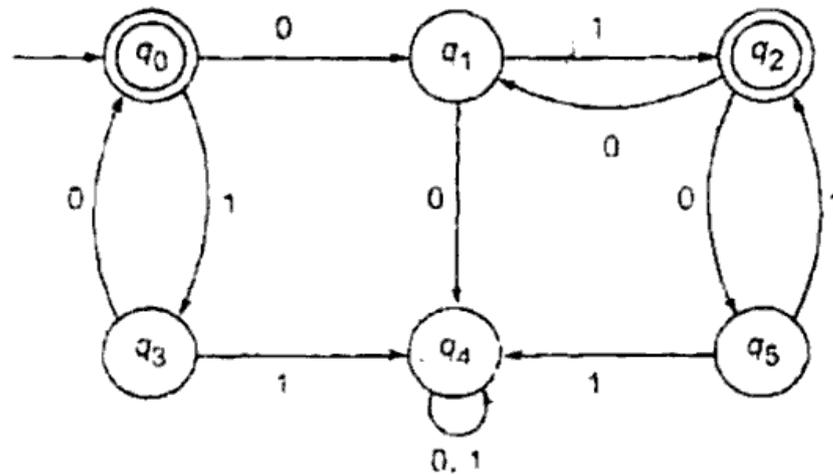


Fig. 3

4. Attempt any *one* part of the following:

7 x 1 = 7

- (a) State Pumping Lemma for regular sets. Show that the set $L = \{a^p \mid p \text{ is a prime}\}$ is not regular.
 (b) Discuss closure properties i.e. concatenation, union, intersection, complement of regular languages.

5. Attempt any *one* part of the following: <https://www.aktuonline.com> 7 x 1 = 7

- (a) Discuss inherent ambiguity of context free languages with suitable example. Construct the context free grammar that accepts language $L = \{a^i b^j c^k \mid i = j \text{ or } j = k; i, j, k \text{ are positive integers}\}$.

- (b) Define parse tree. Find parse tree for the string *abbcd* considering the productions-

$S \rightarrow aAcBc$

$A \rightarrow Ab$

$A \rightarrow b$

$B \rightarrow d$

Is this ambiguous? Justify.

6. Attempt any *one* part of the following:

7 x 1 = 7

- (a) Differentiate between deterministic PDA (DPDA) and non-deterministic PDA (NPDA) with suitable example. Also discuss two stack PDA with example.